

PA 1235465

REC'D 23 MAR 2005

WIPO

PCT

# THE UNITED STATES OF AMERICA

**TO ALL TO WHOM THESE PRESENTS SHALL COME:**

**UNITED STATES DEPARTMENT OF COMMERCE**

**United States Patent and Trademark Office**

**October 13, 2004**

**THIS IS TO CERTIFY THAT ANNEXED HERETO IS A TRUE COPY FROM THE RECORDS OF THE UNITED STATES PATENT AND TRADEMARK OFFICE OF THOSE PAPERS OF THE BELOW IDENTIFIED PATENT APPLICATION THAT MET THE REQUIREMENTS TO BE GRANTED A FILING DATE UNDER 35 USC 111.**

**APPLICATION NUMBER: 60/589,358**

*IB/OS/58965*

**FILING DATE: July 20, 2004**

## **PRIORITY DOCUMENT**

SUBMITTED OR TRANSMITTED IN  
COMPLIANCE WITH RULE 17.1(a) OR (b)

**By Authority of the  
COMMISSIONER OF PATENTS AND TRADEMARKS**



*W. Montgomery*  
**W. MONTGOMERY**  
Certifying Officer

Please type a plus sign (+) inside this box → +

PTO/SB/16 (02-01)  
Approved for use through 10/31/2002. OMB 0651-0032  
Patent and Trademark Office, U.S. DEPARTMENT OF COMMERCE

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

### PROVISIONAL APPLICATION FOR PATENT COVER SHEET

This is a request for filing a PROVISIONAL APPLICATION FOR PATENT under 37 CFR 1.53 (c).

Express Mail Label No. EV 507 975 297 US

Date of Deposit: July 20, 2004

#### INVENTOR(S)

Given Name (first and middle [if any])	Family Name or Surname	Residence (City and either State or Foreign Country)
JOERG JAVIER	HABETHA DEL PRADO PAVON	AACHEN, GERMANY OSSINING, NEW YORK

☐ Additional inventors are being named on the \_\_\_\_\_ separately numbered sheets attached hereto

TITLE OF THE INVENTION (280 characters max)

DISTRIBUTED BEACONING PERIODS FOR AD-HOC NETWORKS

#### CORRESPONDENCE ADDRESS

Direct all correspondence to:

☒ Customer Number

24737

OR

Type Customer Number here

24737

<input type="checkbox"/> Firm or Individual Name	PHILIPS INTELLECTUAL PROPERTY & STANDARDS				
Address	P.O. BOX 3001				
Address	345 SCARBOROUGH ROAD				
City	BRIARCLIFF MANOR	State	NEW YORK	ZIP	10510-8001
Country	USA	Telephone	(914) 333-9608	Fax	(914) 332-0615

#### ENCLOSED APPLICATION PARTS (check all that apply)

☒ Specification Number of Pages

17

☐ CD(s), Number

☒ Drawing(s) Number of Sheets

7

☐ Other (specify)

☐ Application Data Sheet. See 37 CFR 1.76

#### METHOD OF PAYMENT OF FILING FEES FOR THIS PROVISIONAL APPLICATION FOR PATENT (check one)

☐ Applicant claims small entity status. See 37 CFR 1.27.

☐ A check or money order is enclosed to cover the filing fees

FILING FEE  
AMOUNT (\$)

☒ The Commissioner is hereby authorized to charge filing

fees or credit any overpayment to Deposit Account Number: 14-1270

160.00

☐ Payment by credit card. Form PTO-2038 is attached.

The invention was made by an agency of the United States Government or under a contract with an agency of the United States Government.

☒ No.

☐ Yes, the name of the U.S. Government agency and the Government contract number are: \_\_\_\_\_

Respectfully submitted,

SIGNATURE

Date July 20, 2004

TYPED or PRINTED NAME

Aaron Waxler

REGISTRATION NO.: 48,027  
(if appropriate)

Docket Number: US040158

TELEPHONE

(914) 333-9608

### USE ONLY FOR FILING A PROVISIONAL APPLICATION FOR PATENT

This collection of information is required by 37 CFR 1.51. The information is used by the public to file (and by the PTO to process) a provisional application. Confidentiality is governed by 35 U.S.C. 122 and 37 CFR 1.14. This collection is estimated to take 8 hours to complete, including gathering, preparing, and submitting the complete provisional application to the PTO. Time will vary depending upon the individual case. Any comments on the amount of time you require to complete this form and/or suggestions for reducing this burden, should be sent to the Chief Information Officer, U.S. Patent and Trademark Office, U.S. Department of Commerce, Box 1450, Alexandria, VA 22313-1450. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Box Provisional Application, Assistant Commissioner for Patents, Box 1450, Alexandria, VA 22313-1450

15364 U.S. PTO  
60/589358



072004

## DISTRIBUTED BEACONING PERIODS FOR AD-HOC NETWORKS

The present invention relates to a system and method for distributed Beaconing in a wireless personal area network (WPAN).

5 The MultiBand OFDM Alliance (MBOA) has defined a MAC protocol for ultra-wide band (UWB), see MBOA Wireless Medium Access Control (MAC) Specification For High Rate Wireless Personal Area Networks (WPANs), Technical Specification, Draft 0.5, April 2004, which is hereby incorporated by reference as if fully set forth herein. The MBOA MAC protocol eliminates any need for a network infrastructure by distributing functions  
10 across all nodes (devices) of a wireless personal area network (WPAN). All devices send a Beacon at a specific slot in a slotted Beacon Period (BP) 104.

In the MBOA UWB MAC protocol, time is divided into superframes 100, as illustrated in FIG 1. At the beginning of each superframe there is a Beacon Period (BP) 104 followed by a data transfer period 103. The BP comprises a plurality of medium access slots  
15 107 each having three Beacon slots 105. The BP can be either fixed or variable in length 106. In the data transfer period, two access mechanisms are defined.

The first access mechanism is called "Distributed Reservation Protocol" (DRP). Using DRP, devices can make a reservation for a certain sub-period of the data transfer period 103. The reservation is negotiated between a sender and a receiver(s) of the planned  
20 transmission. This negotiation is either carried out by a dedicated signaling handshake, or implicitly by including the reservation information in the sender and receiver(s) Beacons. Once the reservation is established, the reservation information must be included in the Beacon of the sender as well as the receiver(s) in every superframe, in which the reservation is still active. This is necessary in order to inform neighboring devices of the sender and  
25 receiver(s) about the existing reservation. No other device beside the sender(s) is allowed to access the medium at the beginning of a reserved period. In order to make efficient usage of unused reservation periods, two types of reservations are defined: soft and hard reservations. In a soft reservation period other devices can access the medium after a certain idle time on the medium. In a hard reservation other devices are only allowed to access the medium after  
30 the sender and receiver(s) have signaled the end of their transmission(s) by a NAK-RTS / NAK-CTS signaling handshake.

The second access method is the Enhanced Distributed Coordination Function (EDCA) of IEEE 802.11e, which is based on Carrier Sense Multiple Access (CSMA) with back-off protocol. This random access method is only allowed in non-reserved parts of the

data transfer period or in unused reservation periods. Reservations have to be respected by all devices.

In the MBOA distributed MAC protocol Beacons are transmitted in one of the slots of the Beacons Period as disclosed in provisional application entitled "Beaconing Protocol for Ad-Hoc Networks" that is hereby incorporated by reference as if fully set forth herein. The size of the Beacons Period determines the number of devices that can join the network. If only one Beacons Period is allowed there will be some scalability limitations. Moreover, if only one Beacon Period is allowed, when new devices, using a different BP, come into range of existing devices, the BPs need to be re-aligned and synchronized into one single BP, creating a transition state that may cause some communication disruption.

One potential solution to this problem is to send the beacons using EDCA, a contention based access, without the need of coalescing all beacons to a single slotted Beacons Period. However, EDCA introduces random delays in the transmission of Beacons. These delays limit the benefits of devices using power management schemes. That is, devices that wake up to receive the Beacons from neighbors, do not exactly know when the Beacons are going to be sent, and therefore need to remain awake for an undetermined period of time. Moreover, if EDCA is used, there is a certain probability that Beacons collide (with other Beacons, or any other transmission), and therefore, reception of Beacons is not guaranteed. In addition, the sender(s) of Beacons(s) do not get any feedback from the receiver(s), and therefore there is no possibility for the sender(s) of the Beacon(s) to detect that their Beacons have collided. Additionally, the beacons are used to announce reservations of the medium. If the beacons collide, devices do not become aware of neighbors reservations, and therefore there is a risk of collisions during the data period as well.

In order to circumvent these disadvantages the present invention provides a MAC protocol having multiple distributed Beacons Periods accessed using the access method disclosed in provisional application entitled "Beaconing Protocol for Ad-Hoc Networks" that is hereby incorporated by reference as if fully set forth herein.

The present invention employs a superframe structure having a slotted Beacons Period, see FIG. 1. According to the present invention, a MAC superframe structure is provided that includes slotted Beacons Periods (BPs) 101 comprising a plurality of MAS slots 107 and a data transfer period 103. All ad-hoc network devices participate in sending Beacons. Medium access in a contention period of the data transfer period 103 is based on an enhanced distributed channel access or EDCA-like mechanism.

A periodic transmission of a Beacon is the technique employed to maintain coordination between communicating devices in an ad hoc network, according to "MultiBand OFDM Alliance Wireless Medium Access Control (MAC) Specification for High Rate Wireless Personal Area Networks (WPANs)", MBOA MAC Specification Draft 0.5, April 5 2004, that is hereby incorporated by reference as if fully set forth herein. Beacons provide the basic timing for the network including information regarding isochronous reservations. Devices that wish to communicate must belong to the same Beacon Group or set of devices that are within radio range of a given device and that Beacon during the same Beacon Period (BP).

10 In order to reduce the number of Beacon (and thereby reservation) collisions each device keeps sending its Beacon in the same Beacon slot in subsequent superframes. Surrounding devices, that can receive the Beacon, mark this Beacon slot as occupied. Each device selects its Beacon slot from among the un-occupied Beacon slots of a Beacon Period. Each device has to maintain one additional bitmap to store the occupancy of Beacon slots as well as the number of its own Beacon slot. The status of a Beacon slot is changed from 15 occupied to un-occupied whenever no Beacon has been received in the respective slot for  $n$  subsequent superframes, where  $n$  is a pre-determined integer.

In a first embodiment, no information regarding the Beacons of other devices is reported in a Beacon.

20 In a second embodiment the probability of a collision is reduced.

Referring now to FIG. 1, in order to transmit/receive Beacons, devices designate a time period of a superframe as a Beacon Period 104 that is strictly reserved for Beacon transmission and reception. Further, each Beacon Period can be fixed or variable. The group of devices that share this Beacon airtime is termed a Beacon Group. That is, a Beacon Group 25 is defined locally with respect to a given device as a set of devices that synchronize their Beacon transmissions within the same medium access slots (MAS) and that identify these MAS as their BP. As disclosed in provisional application entitled "Beaconing Protocol for Ad-Hoc Networks" a BP is defined by a pre-determined number of contiguous MAS designated by the Beacons of one or more devices, as a BP (also known hereinafter at a 30 slotted Beaconing Period) 104.

A Cluster is a set of devices within the radio range of a device and includes all devices within a Beacon Group. A Cluster may also include devices within the radio range that belong to another Beacon Group.

Other features and advantages of the present invention will be obvious from the following drawings and detailed description of the invention.

FIG. 1 illustrates a MAC superframe structure according to the present invention.

FIG. 2a illustrates a slotted Beaconing period.

5 FIG. 2b illustrates a MAS structure of a MAC superframe according to the present invention.

FIG. 3 illustrates an architecture of a wireless communication system whereto embodiments of the present invention are to be applied.

10 FIG. 4 illustrates a simplified block diagram of a wireless device of the communication system of FIG. 3 according to an embodiment of the present invention.

FIG. 5 illustrates a finite state diagram for a synchronization functionality of the Distributed Beacon processing component.

15 FIG. 6 illustrates a finite state diagram for a periodic scanning functionality of the Distributed Beacon processing component to detect new BPs in order to maintain the state of existing reservations and resolve collisions.

20 It is to be understood by persons of ordinary skill in the art that the following descriptions are provided for purposes of illustration and not for limitation. An artisan understands that there are many variations that lie within the spirit of the invention and the scope of the appended claims. Unnecessary detail of known functions and operations may be omitted from the current description so as not to obscure the present invention.

The present invention overcomes the disadvantages of EDCA Beaconing scheme discussed above, by providing a distributed Beaconing method with some modifications to the access method as disclosed in provisional application entitled "Beaconing Protocol for Ad-Hoc Networks."

#### 25 BP Structure

30 The channel time is divided into superframes, with each superframe beginning with a BP. The BP is used to send Beacons. FIG. 1 illustrates a MAC superframe structure 101 according to the present invention. In an ad-hoc network all devices participate in sending Beacons. Each MAC superframe structure 102 comprises a sequence of at least one superframe 102 that begins at TBTT or BPST (Beaconing Period Start Time) 101 and continues for a slotted BP Length 106 and followed by a data transfer period 103. The BP Length 106 may be fixed or variable.

### Channel Access

In a first embodiment, no information regarding the Beacons of other devices is reported in a Beacon. This reduces the size of the Beacons and the complexity of the Beacons protocol significantly. However, with such a solution, Beacon collisions might occur in hidden station scenarios, as Beacon information is transmitted only to direct neighbors of a device and not to the neighbors' neighbors. Instead of avoiding such situations before they occur, in this embodiment the collisions are resolved after they have occurred. A device that detects a collision (because an expected Beacon is missing) announces the detection of the collision in its Beacon by including the MAC ID of the device in a collision information field. A device, that detects that its MAC ID is included in another device's Beacon, changes its Beacon position in the subsequent superframe. A special bit in the Beacon is used to announce a forthcoming Beacon position change in the subsequent superframe. This is required in order to allow the neighboring devices to distinguish between missing Beacons due to intentional Beacon position changes and missing Beacons due to Beacon collisions. In order to avoid that constant collision of Beacons, in case that no other device detects a collision, each device periodically changes its Beacon position after  $m$  superframes, where  $m$  is a pre-determined value.

In a second embodiment, Beacon collisions are not avoided completely, but their probability is simply reduced by changing the Beacon position in every  $m^{\text{th}}$  superframe, where  $m$  is a pre-determined value.

### Beacon Periods (BPs) Initialization

Every device that intends to participate in communication with other devices sends a Beacon. When a device is turned on it scans the medium for existing Beacon Periods. The device may decide to join an existing Beacon Period. In this case, a Beacon is sent in one of the empty slots of the existing Beacon Period using the protocol as disclosed in provisional application entitled "Beaconing Protocol for Ad-Hoc Networks" or the modified protocol explained above.

Each device scans the medium for beacons. If no beacon is received, the device sets its own Target Beacon Transmission Time (TBTT) or Beacon Period Start Time (BPST) and transmits a first Beacon. If, however, a beacon is received, the device looks for an empty slot in the Beacon Period and selects one, if one is available. Once a slot is chosen unless a collision is detected, the Beacon is always sent by the device in the same slot. If more than one Beacon is received, then the device synchronizes to the fastest clock.

A device may also decide to create a new Beacons period, for example, to create a new WUSB cluster. Preferably, new BPs are not created unless it is strictly necessary, for example, due to a lack of empty slots in existing BPs. The new BP must not collide with existing BPs and/or existing DRP reservations. In other words, one of the main reasons to  
5 create a new Beacon period may be that the existing Beacon Periods are already fully occupied. A BP may be considered fully occupied if all but the last or all but a few beacon slots are occupied. The last beacon slot may be reserved for specific purposes (like the association of new devices to the ad hoc network or the announcement of other Beacon Periods).

#### 10 Co-existence of Multiple BPs

If a device decides to create a new BP, it announces the creation of the new BP in the already existing BPs. The new device sends a Beacon in the existing BPs and marks the time used by the new BP as a hard DRP reservation with priority = BP. Devices receiving  
15 Beacons that include a DRP reservation with priority BP include a duplicate of the reservation in their own Beacons. The device keeps Beacons in the existing BPs until a duplicate of its reservation is received in other Beacons. The newly created BP is created so that it does not collide with other existing BPs and must respect existing reservations of the medium from neighbor devices.

It may also happen that multiple BPs need to co-exist due to mobility. When an  
20 "alien" BP is detected, a device announces the existence of the "alien" BP and protects it by including a DRP reservation of type BP in its own Beacon with priority = BP.

If existing DRP reservations collide with a BP, the BP has the highest priority, and therefore alternative DRP reservations need to be renegotiated.

If two or more BPs collide, devices with colliding Beacons search for empty Beacon  
25 slots. Optionally, these devices may start a new BP in a "non-colliding" time.

In a one embodiment, peer devices Beacon in the same BP. If a transmitter device communicates with devices that beacon in multiple (different) BPs, the transmitter device beacons in said multiple BPs. If communicating devices originally beacon in different BPs, two solutions are possible: either a communicating device stops beaconing in its current BP  
30 and starts beaconing in the BPs of the communication partners, or a device continues to beacon in its current BP and additionally starts beaconing in the BPs of the communication partners. The former solution comprises a switch of Beacon Periods. Which devices switch their beacon periods and which devices remain in their current BPs, may e.g. be based on the identifier (ID) of the devices, the number of occupied beacon slots in the BPs of the devices,



or the traffic managed by the BP. The device, which stays in its BPs may e.g. be the device with the lowest ID or with the largest number of occupied beacon slots in its BPs or the highest managed traffic in its BPs.

5 In an alternative embodiment, peer devices may beacon in different BPs. This requires that all devices periodically listen to all BPs in the network.

#### Switching of BPs

When two or more BPs co-exist, devices may optionally switch to another BP. If a device switches to another BP, the switching device continues Beacons in the original BP during "x" superframes in order to announce that it's switching BP, where "x" is a  
10 predetermined integer. This is done through a special switching announcement field included in the Beacon. The device also includes a DRP reservation of type BP to protect the new BP, if the new BP was not already protected.

#### Termination of BP

A BP terminates and therefore the DRP BP reservation can be cleared when no  
15 Beacons are heard during that BP during "x" consecutive superframes, where x is a predetermined integer.

If a device detects collisions of alien BPs, it may send a Beacon within the colliding BPs and announce the collision. This is done through a special announcement field included in the Beacon.

20 The apparatus and method of the present invention can be used for wireless personal area networks (WPANs) and local area networks (WLANs) 300 in which wireless devices 301 comprise a MAC module modified according to the present invention. FIG. 3 illustrates a representative wireless network whereto embodiments of the present invention are to be applied. According to the principle of the present invention, there is provided a MAC module  
25 400, see FIG. 4, configured to perform a distributed Beacons Period protocol with slotted channel access. It should be noted that the network illustrated in FIG. 3 is small for purposes of illustration only. In practice, WLANs may include a much larger number of wireless devices incorporating the present invention.

Referring now to FIG. 4, each device 301 within an ad-hoc network, as illustrated in  
30 FIG. 3 may, include a MAC module 400 with an architecture that is illustrated in the block diagram of FIG. 4. Each device 301 may include a MAC module 400 having controller 402 coupled to at least a transmitter 401, a distributed Beacon Period processing component 403 according to the present invention, and a receiver 404. The transmitter 401 and the receiver 404 are coupled to an antenna 405. The distributed Beacon Period processing component 403

provides adaptive programming such that, for example, multiple BPs can coexist where a BP can be "native", i.e., according to the present invention, as well as an "alien" BP, i.e., according to another protocol such as IEEE 802.11

Referring now to FIG. 5, when a device is turned on 501, it scans for existing BPs during at least one superframe 502. A BP is detected if one or more Beacons are received. A BP is identified by its Beaconing Period Start Time (BPST). If no BPs are detected, the device creates a new Beaconing Period by sending a Beacon and setting the BPST 503. The device can choose the BPST randomly.

If one or more BP is detected, the device can join an existing Beaconing Period by sending a Beacon in one of the empty slots 505 or can start a new BP 503. The new BPST is chosen so it does not collide with existing BPs and/or DRP reservations.

If one or more BPs were detected during the scanning process, the device decodes neighbors' Beacons and makes sure that the BP is already protected in the neighboring BP(s) via a DRP reservation. If its own BP is not protected in the neighbor BP(s), the device sends a Beacon in the neighbor BP(s), during N predetermined number of superframes, in order to announce and protect its own BP 506. The Beacon also includes a DRP information element (IE) indicating a DRP reservation of type BP.

If the new BP is already protected, the device directly starts normal operation 507.

Referring now to FIG.6, devices periodically scan to detect new BPs 601 in order to maintain the state of existing reservations, and potentially resolve collisions. If a neighbor BP is detected, the device includes a DRP of type BP in its own beacon 602. Devices that receive a beacon that includes a DRP reservation of type BP or a switching announcement, scan for neighbor BPs 603. If, during the scanning process, a neighbor BP is detected, a DRP reservation of type BP is included in its own beacon 602.

If existing DRP reservations collide with a BP, the BP has the highest priority, and therefore other DRP reservations are renegotiated and moved 604. If two or more BPs collide, devices with colliding beacons search for empty non-colliding slots or start a new BP in other idle slots 607.

When two or more BPs exist, devices optionally switch to another BP. If a device leaves the current BP(s), it keeps beaconing in the current BP(s) 605 during N predetermined number of superframes in order to announce that it's leaving the BP(s). The beacon sent in the current BP(s) includes a switching BP announcement 606. If the new BP is not protected in current BP, the device also includes a DRP of type BP.

While the preferred embodiments of the present invention have been illustrated and described, it will be understood by those skilled in the art that the embodiments as described herein are illustrative and various changes and modifications may be made and equivalents may be substituted for elements thereof without departing from the true scope of the present invention. In addition, many modifications may be made to adapt the teachings of the present invention to a particular situation without departing from its central scope. Therefore, it is intended that the present invention not be limited to the particular embodiments disclosed as the best mode contemplated for carrying out the present invention, but that the present invention include all embodiments falling within the scope of the appended claims.

We claim:

1. A method for a distributed beaconing period protocol for a device in an ad hoc network (300) of devices (301), comprising the device (301) performing the steps of:  
dividing (502) the medium access time into a sequence of at least one contiguous superframe (102) beginning at a Beacon Period Start Time (101);  
partitioning the superframe (102) into a slotted Beaconing Period BP (104), having a plurality of contiguous beacon slots (105), followed by a data transfer period; and  
associating with at least one of an existing ad hoc network BP(505) or creating a new ad hoc network BP (503) as the BP of the device.
2. The method of claim 1, further comprising the steps of:  
if the BP of the device is not protected in at least one neighboring BP, protecting (506) the unprotected BP in the at least one neighboring BP; and  
once the BP of the device is protected, operating normally (507) (600).
3. The method of claim 2, wherein the protecting step further comprises the step of including a first reservation for the own BP in the own beacon of the device in the at least one neighboring BP.
4. The method of claim 3, wherein the reservation is a DRP reservation of type BP and priority = BP.
5. The method of claim 3, wherein the first associating step further comprises the steps of:  
choosing an empty slot (505) of the BP of the device; and  
beaconing (505) an own beacon of the device in the chosen empty slot.
6. The method of claim 5, further comprising the step of including information regarding the beacons of other devices in the own beacon of the device.
7. The method of claim 6, wherein the protecting step further comprises the step of including a second reservation in the own beacon of the device to announce the BP of said other devices.

8. The method of claim 7, wherein the second reservation is a DRP reservation of type BP and priority = BP.

9. The method of claim 3, wherein the associating step comprises the steps of: scanning the medium to detect at least one BP during the at least one superframe (502);

if at least one BP is not detected, starting a new BP as the BP of the device at a beacon period start time calculated in a pre-determined manner; and

if at least one BP is detected, deciding to perform one of the steps of:

- i. joining at least one of the at least one detected BP as the BPs of the device (505), and
- ii. starting a new BP as the BP of the device at a beacon period start time determined in a pre-determined manner (503).

10. The method of claim 9, wherein the associating step further comprises the steps of:

choosing an empty slot of the BP of the device (505); and

beaconing an own beacon of the device in the chosen empty slot (505).

11. The method of claim 10, further comprising the step of including information regarding the beacons of other devices in the own beacon of the device.

12. The method of claim 8, wherein the protecting step further comprises the step of including a third reservation in the own beacon of the device in the neighboring BPs to announce the BP.

13. The method of claim 12, wherein the third reservation is a DRP reservation of type BP and priority = BP.

14. The method of claim 3, wherein the step of operating normally C comprises the steps of:

receiving beacons over the medium (601); and

when a beacon comprising a DRP reservation of type BP is received, performing the steps of-

- scanning for a new BP (603), and
- when a new BP is detected, protecting the new BP (602).

15. The method of claim 14, wherein the protecting steps further comprise the step of including a fourth reservation in the own beacon of the device to protect the BP.

16. The method of claim 15, wherein the fourth reservation is a DRP reservation of type BP and priority = BP (602).

17. The method of claim 14, wherein the step of operating normally (507) (600) further comprises the step of a device optionally switching BP if two or more BPs co-exist (605) (606) (607).

18. The method of claim 17, wherein the step of switching BP by the device further comprises the steps of:

including a special switching announcement field in a beacon to announce a new BP (606); and

beaconing for at least a predetermined announcement number of consecutive superframes with the beacon including the special switching announcement field (605).

19. The method of claim 18, wherein the beaconing step further comprises one of the steps selected from the group consisting of:

(a) performing the steps of -

- including a DRP reservation of type BP to protect the new BP, if the new BP is not already protected (607), and
- stopping transmission of the beacon, if the new BP is already

protected; and

(b) transmitting a beacon in the new BP.

20. The method of claim 18, wherein the step of operating normally (507) (600) further comprises the steps of:

when a beacon comprising a BP switching announcement of another device is received, performing the steps of -

- scanning for a new BP (603), and
- when a new BP is detected, protecting the new BP (602).

21. The method of claim 2, wherein the operating normally step (507) (600) further comprises the step of terminating the BP.

22. The method of claim 2, wherein the operating normally step (507) (600) further comprises the step of clearing a DRP BP reservation of the device when no beacons are received during the BP for a pre-determined clearing number of consecutive superframes.

23. The method of claim 14, wherein the step of operating normally (507) (600) further comprises the step of when at least two BPs collide, until there are no longer any colliding BPs, repeatedly performing at least one of the steps selected from the group consisting of:

- (a) performing the substeps of:
  - searching each colliding BP for enough empty beacon slots for the devices of an other colliding BP (608), and
  - moving at least one colliding BP to a non-colliding beacon period start time (604); and
- (b) performing the substeps of -
  - searching the superframe for enough empty beacon slots for the own BP, and
  - and moving the BP to the empty slots in the superframe (608).

24. The method of claim 23, wherein the step of operating normally (507) (600) further comprises the step of when an existing DRP reservation collides with a BP, moving the colliding DRP reservation to a non-colliding time (608).

25. The method of claim 23, wherein the step of operating normally (507) (600) further comprises the step of when an existing DRP reservation collides with a BP, moving the BP to a non-colliding time (604).

26. The method of claim 1, further comprising the step of each device (301) of the ad hoc network of devices (300) beaconing in the same BP, by performing one of the substeps selected from the group consisting of:

- beaconing in parallel in each BP of each device (301) of said network of devices (300); and
- switching an own BP to beacon in a same BP as other devices (301) of said network of devices (300).

27. The method of claim 26, wherein a device(301) that does not have to switch its BP is chosen in a distributed way based on an identifier of each device (301) of said network of devices (300).

28. The method of claim 26, wherein a device (301) that does not have to switch its BP is chosen in a distributed way based on the number of occupied beacon slots in the BP of each device (301) of said network of devices (300).

29. The method of claim 26, wherein a device (301) that does not have to switch its BP is chosen in a distributed way based on the size of the portion of the superframe (102) that is reserved by the beacons in a BP of a device (301) of said network of devices (300).

30. The method of claim 1, wherein each device (301) of said network of devices (300) may beacon in a different BP.



31. A distributed beaconing apparatus for an ad hoc network device, comprising:  
a receiver (404) for receiving beacons (105) and data transfers from other ad hoc network devices (301);  
a transmitter (401) for transmitting own beacons of the device and data;  
a distributed beacon period processing component (403) that processes received beacons and own beacons of the device (301) for transmission;  
a controller (402) operatively coupled to said distributed beacon processing component (403) and configured to direct said processing component to -
- i. divide the medium into a sequence of superframes (102) comprising at least one slotted beaconing period (BP) (104) and including a certain number of beacon slots each having a pre-determined beacon slot length (202), said slotted BP (104) being followed by a data transfer period (103), and
  - ii. associate with at least one of an existing ad network BP and a new ad hoc network BP as the BPs of the device (301).
32. The apparatus of claim 31, wherein said controller (402) is further configured to direct said distributed beacon processing component (403) to:
- iii. protect the BPs of the device in neighboring BPs (506); and
  - iv. operate normally, once the BP of the device is protected (507) (600).
33. The apparatus of claim 32, wherein the controller is further configured to:  
choose an empty slot of the BP of the device; and  
beacon an own beacon of the device in the chosen empty slot.
34. The apparatus of claim 32, wherein the distributed BP processing component protects the BP of the device by including a DRP reservation of type BP and priority = BP in the own beacon of the device to announce the BP to neighboring devices.
35. The apparatus of claim 34, wherein the distributed BP processing component is further configured to include information regarding the beacons of other devices in the own beacon of the device.

36. The apparatus of claim 35, wherein the controller (402) is further configured to control the distributed BP to:

- scan the medium to detect at least one BP during the at least one superframe (502);
- if at least one BP is not detected (503), start a new BP as the BP of the device at a beacon period start time calculated in a pre-determined manner; and
- if at least one BP is detected, decide to perform one of (504):
  - i. join one of the at least one detected BP as the BP of the device (505), and
  - ii. start a new BP as the BP of the device at a BP start time determined in a pre-determined manner (503).

37. The apparatus of claim 36, wherein for normal operation (507) (600) the controller (402) is further configured to:

when a received beacon includes at least one of a DRP reservation of type BP and a BP switching announcement for an other device

- scan for a new BP (603), and
- when a new BP is detected, protect the new BP (602);

when a beacon of a neighbor is received, protect the neighbor BP (602);

when the device switches BPs announce in the own beacon of the device, for a predetermined announcement number of consecutive superframes, that the device is switching BP (606);

optionally switch BPs if two or more BPs co-exist (608);

terminate the BP;

clear a DRP BP reservation of the device when no beacons are received during the BP for a pre-determined clearing number of consecutive superframes.

when at least two BPs collide, until there are no longer any colliding BPs repeatedly perform at least one function selected from the group consisting of search each colliding BP for enough empty beacon slots for the devices of an other colliding BP; and move at least one colliding BP to a non-colliding beacon period start time (608); and

when an existing DRP reservation collides with a BP, moving the colliding DRP reservation to a non-colliding time of the data transfer period (604).

**ABSTRACT**

In a distributed Mac protocol having a slotted superframe (102) comprising at least one slotted beacon period (104) followed by a data transfer period (103), a system and method is provided for creating and maintaining several beacon periods (104) at different positions in the superframe (102). When joining the network (300) a device (301) either joins an existing beacon period (104) or creates a new beacon period (104) at a position in the superframe (102) that does not overlap with existing beacon periods (104) or reservation periods. Beacon periods (104) mutually protect each other by devices (301) announcing the neighboring beacon periods in their beacons.

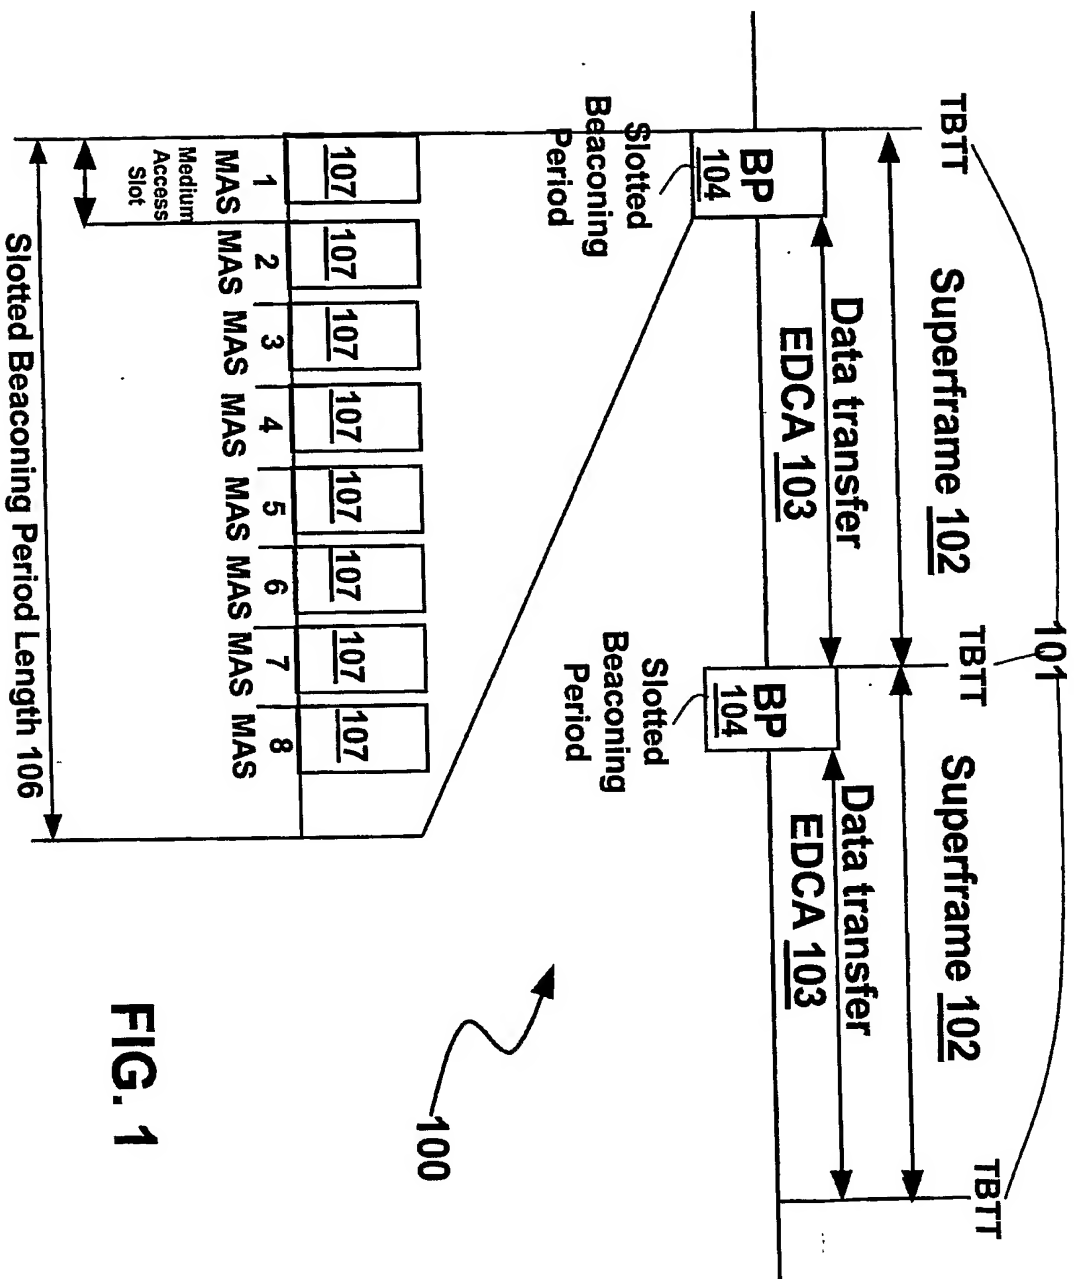


FIG. 1

# Slotted Beaconsing Period

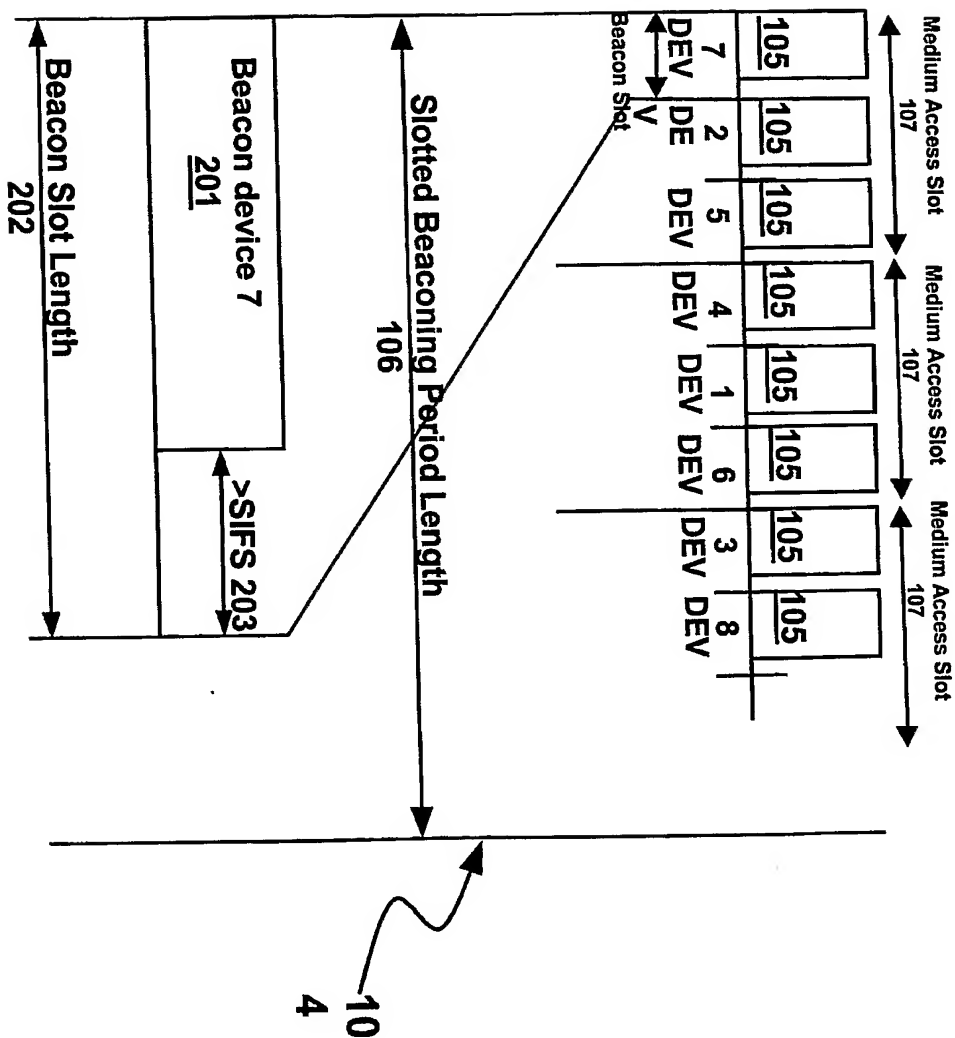


FIG. 2a

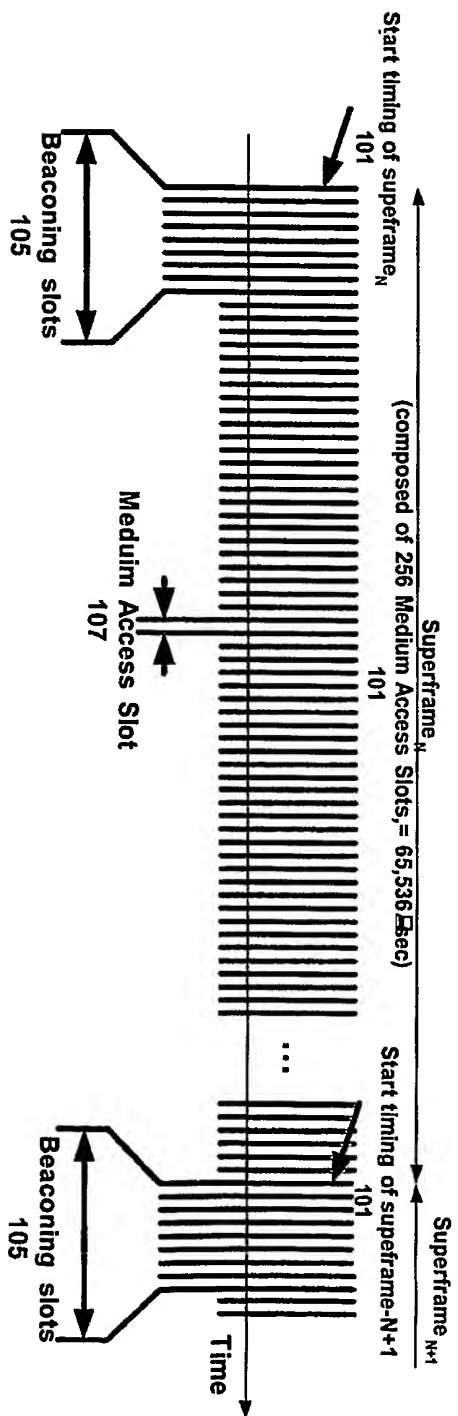


FIG. 2b

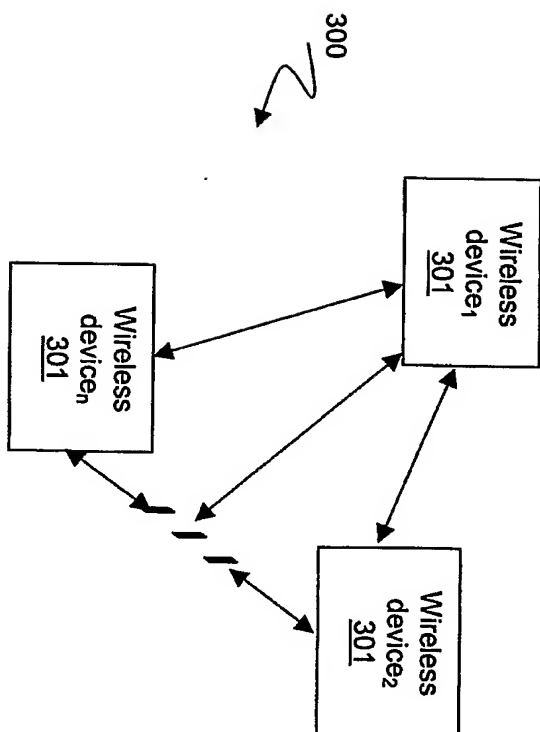


FIG. 3

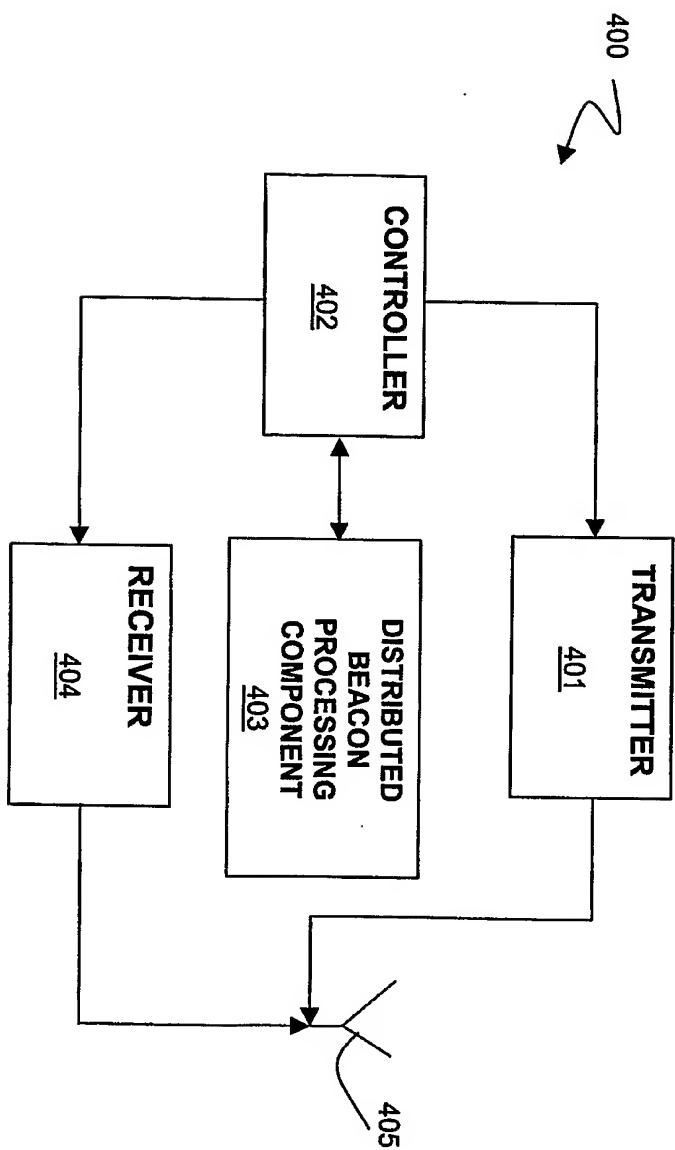


FIG. 4



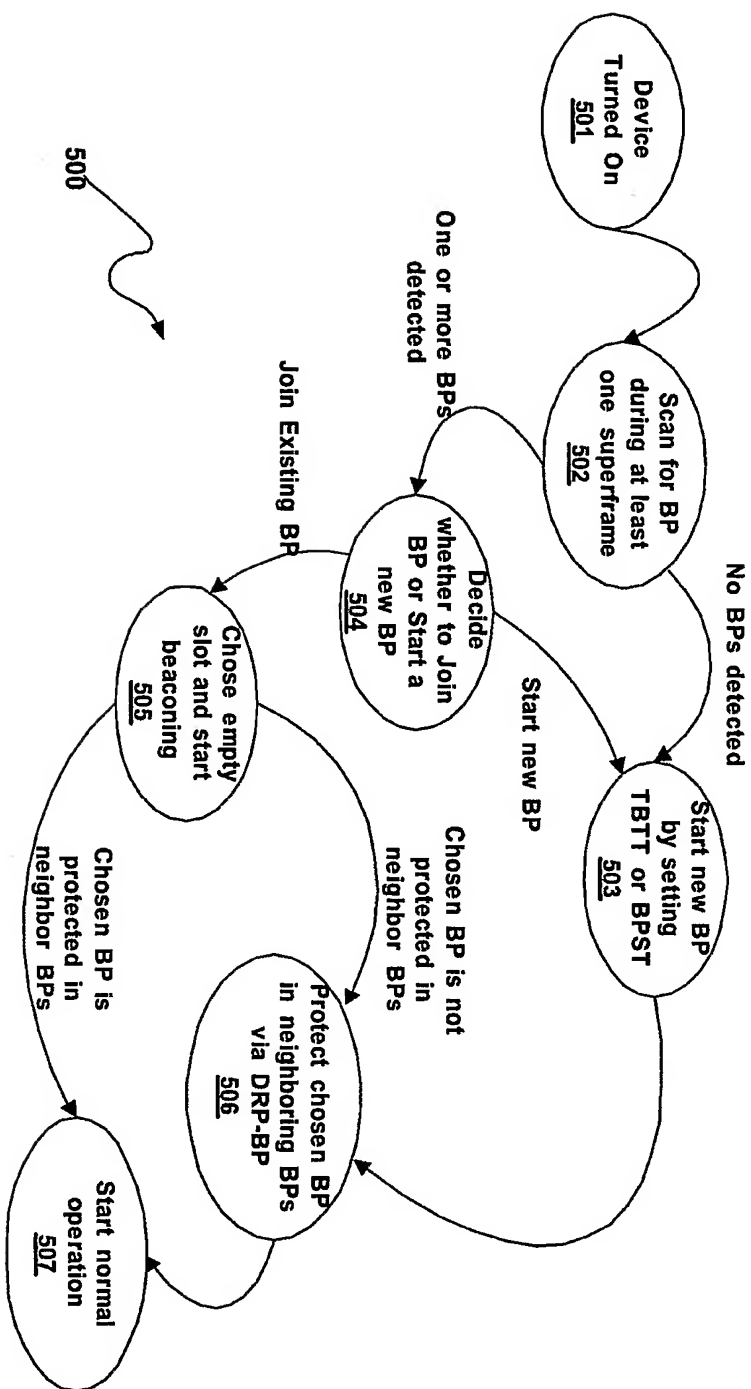


FIG. 5

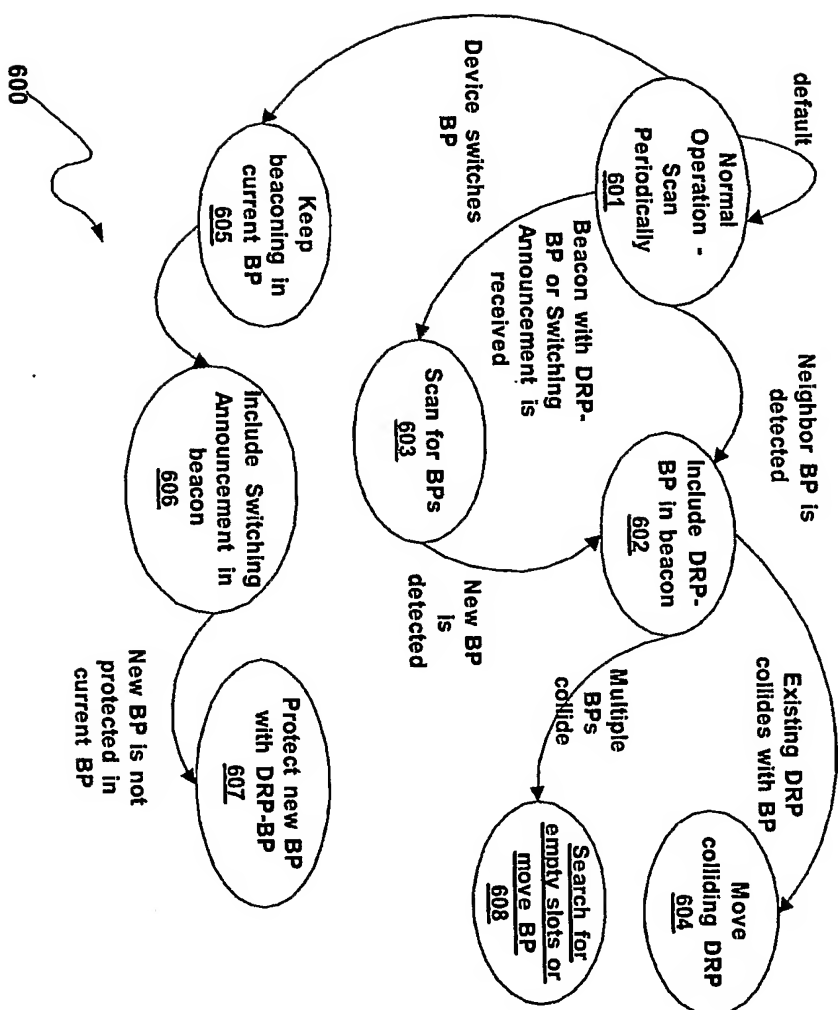


FIG. 6